

BOQ For Installation of Collection Booth at BH - Imaduwa

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
28.7	76x1.2mm thick natural aluminium partition frame is panelled with aluminium composite panel of total thickness 4mm, with both sides Polyester coated aluminium sheets of 0.2mm thick, 1220 mm height, completed with board joint stapled with necessary pop rivots, gasket & etc. and work complete in order	5	m2		
28.8	sashes 50x25mm 0.9mm thick natural aluminium door frame with double sash saloon hinged dual swing openable door with 50x26 Aluminium door section outer rail panelling with Polyester coated aluminium composite panel of 0.12 mm thick aluminium sheets both sides of total thickness 3mm at panel, rubber beading, gaskets, poprivots, with nut and approved hinges for saloon doors	1.5	m2		
28.9	Supply and fix zinc alum profile roofing colour sheet with screws and washer, laid on existing purlings with joints to be properly connected with an adequate side lap to ensure water tightness along the entire length and complete to working order. (Thk. 0.47mm, AZ 150)	5	m2		
28.10	Supply and fix 460mmx 380mm stainless steel 0.8mm thick shiny finish kitchen sink with single bowl an authorized agent. including PVC bottle trap and water connection with flexible hose, all complete to working order. (Swannecktap paid separately.) Prime cost of the kitchen sink is Rs.10,750.00 (sink frame paid separatly)	1	nos		
28.11	Supplying and fixing Plastic 1/2" Swan-necktap of "S-lon" brand or approved equivalent.	1	nos		
28.12	Allow provisional sum for: 1.) Supplying water line and supply line including all fittings. Waste line should connecting to existing gulley line properly. 2.) Arranging sample table. 3.) connecting the roofing sheet to existing frame.		PS		20,000.00
Total Cost Carried to Summary					

BOQ For Installation of Collection Booth at NH - Kandy

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
	<i>All renovations are to be carried out disturbance to the hygienic condition maintained within the hospital premises. Safety precautions shall be included into relevant rates of items of the BOQ.</i>				
	<i>Prior approval for materials shall be obtained from Engineer Before Commencing Work.</i>				
	<i>Paint sample should be approved by Engineer</i>				
	<i>Before leaving the site clean to the satisfaction of the Engineer at the completion of work.</i>				
	<i>Any other Work except this Work sheet should be approved in formal way before commencing Work.</i>				
	Proposed Collection Booth				
	29 . NH - Kandy				
29.1	Site Clearing, Removing All kind of plants, , manual excavation for floor concrete.	1.5	L day		
29.2	concrete (Grade 20) prepared at site manually., floor area etc	0.2	m3		
29.3	Shuttering for floor concrete dation with 1" thick rubber planking including dismantling	2	m2		
29.4	Supplying and fixing GI box bar 40mm x 40mm x1.4 mm thickness for of Coulumns(04 nos), roof, wash basin, sample table. Without Painting.	15	lm		
29.5	Painting two coats of enamel paint for columns including clearing surface before commencing painting work.	15	lm		
29.6	Rendering 1/2" thick in cement and sand 1:3 in concrete areas finished smooth with cement slurry and colour pigment.	2	m2		

BOQ For Installation of Collection Booth at NH - Kandy

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
29.7	76x1.2mm thick natural aluminium partition frame is panelled with aluminium composite panel of total thickness 4mm, with both sides Polyester coated aluminium sheets of 0.2mm thick, 1220 mm height, completed with board joint stapled with necessary pop rivots, gasket & etc. and work complete in order	5	m2		
29.8	sashes 50x25mm 0.9mm thick natural aluminium door frame with double sash saloon hinged dual swing openable door with 50x26 Aluminium door section outer rail panelling with Polyester coated aluminium composite panel of 0.12 mm thick aluminium sheets both sides of total thickness 3mm at panel, rubber beading, gaskets, poprivots, with nut and approved hinges for saloon doors	1.5	m2		
29.9	Supply and fix zinc alum profile roofing colour sheet with screws and washer, laid on existing purlings with joints to be properly connected with an adequate side lap to ensure water tightness along the entire length and complete to working order.(Thk. 0.47mm, AZ 150)	5	m2		
29.10	Supply and fix 460mmx 380mm stainless steel 0.8mm thick shiny finish kitchen sink with single bowl an authorized agent, including PVC bottle trap and water connection with flexible hose, all complete to working order.(Swannecktap paid separately.) Prime cost of the kitchen sink is Rs.10,750.00(sink frame paid separatly)	1	nos		
29.11	Supplying and fixing Plastic 1/2" Swan-necktapof "S-lon" brand or approved equivalent.	1	nos		
29.12	Allow provisonal sum for 1.)Supplying water line and supply line including all fittings. Waste line should connecting to existing gulley line properly. 2.)Arranging sample table. 3.)conncting the roofing sheet to existing frame.		PS		20,000.00
Total Cost Carried to Summary					

Z

57

BOQ For Installation of Collection Booth at BH - Gampola

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
	<i>All renovations are to be carried out disturbance to the hygienic condition maintained within the hospital premises. Safety precautions shall be included into relevant rates of items of the BOQ.</i>				
	<i>Prior approval for materials shall be obtained from Engineer Before Commencing Work.</i>				
	<i>Paint sample should be approved by Engineer</i>				
	<i>Before leaving the site clean to the satisfaction of the Engineer at the completion of work.</i>				
	<i>Any other Work except this Work sheet should be approved in formal way before commencing Work.</i>				
	Proposed Collection Booth				
	30 . BH - Gampola				
30.1	Site Clearing, Removing All kind of plants, , manual excavation for floor concrete.	1.5	L day		
30.2	concrete (Grade 20) prepared at site manually,, floor area etc	0.2	m3		
30.3	Shuttering for floor concrete dation with 1" thick rubber planking including dismantling	2	m2		
30.4	Supplying and fixing GI box bar 40mm x 40mm x1.4 mm thickness for of Coulumns(04 nos), roof, wash basin, sample table. Without Painting.	15	lm		
30.5	Painting two coats of enamel paint for columns including clearing surface before commencing painting work.	15	lm		
30.6	Rendering 1/2" thick in cement and sand 1:3 in concrete areas finished smooth with cement slurry and colour pigment.	2	m2		

BOQ For Installation of Collection Booth at BH - Gampola

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
30.7	76x1.2mm thick natural aluminium partition frame is panelled with aluminium composite panel of total thickness 4mm. with both sides Polyester coated aluminium sheets of 0.2mm thick, 1220 mm height, completed with board joint stapled with necessary pop rivots, gasket & etc. and work complete in order	5	m2		
30.8	sashes 50x25mm 0.9mm thick natural aluminium door frame with double sash saloon hinged dual swing openable door with 50x26 Aluminium door section outer rail panelling with Polyester coated aluminium composite panel of 0.12 mm thick aluminium sheets both sides of total thickness 3mm at panel, rubber beading, gaskets, pop rivots, with nut and approved hinges for saloon doors	1.5	m2		
30.9	Supply and fix zinc alum profile roofing colour sheet with screws and washer, laid on existing purlings with joints to be properly connected with an adequate side lap to ensure water tightness along the entire length and complete to working order. (Thk. 0.47mm, AZ 150)	5	m2		
30.10	Supply and fix 460mmx 380mm stainless steel 0.8mm thick shiny finish kitchen sink with single bowl an authorized agent, including PVC bottle trap and water connection with flexible hose, all complete to working order. (Swannecktap paid separately.) Prime cost of the kitchen sink is Rs.10,750.00 (sink frame paid separately)	1	nos		
30.11	Supplying and fixing Plastic 1/2" Swan-necktap of "S-lon" brand or approved equivalent.	1	nos		
30.12	Allow provisional sum for. 1.) Supplying water line and supply line including all fittings. Waste line should connecting to existing gulley line properly. 2.) Arranging sample table. 3.) Connecting the roofing sheet to existing frame.		PS		20,000.00
Total Cost Carried to Summary					

BOQ For Installation of Collection Booth at Prison - Kandy

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
	<i>All renovations are to be carried out disturbance to the hygienic condition maintained within the hospital premises. Safety precautions shall be included into relevant rates of items of the BOQ.</i>	Note			
	<i>Prior approval for materials shall be obtained from Engineer Before Commencing Work.</i>	Note			
	<i>Paint sample should be approved by Engineer</i>	Note			
	<i>Before leaving the site clean to the satisfaction of the Engineer at the completion of work.</i>	Note			
	<i>Any other Work except this Work sheet should be approved in formal way before commencing Work.</i>	Note			
	Proposed Collection Booth				
	31 . Prison - Kandy				
31.1	Site Clearing, Removing All kind of plants, , manual excavation for floor concrete.	1.5	L day		
31.2	concrete (Grade 20) prepared at site manually., floor area etc	0.2	m3		
31.3	Shuttering for floor concrete dation with 1" thick rubber planking including dismantling	2	m2		
31.4	Supplying and fixing GI box bar 40mm x 40mm x1.4 mm thickness for of Coulumns(04 nos), roof, wash basin, sample table. Without Painting.	15	lm		
31.5	Painting two coats of enamel paint for columns including clearing surface before commencing painting work.	15	lm		
31.6	Rendering 1/2" thick in cement and sand 1:3 in concrete areas finished smooth with cement slurry and colour pigment.	2	m2		

BOQ For Installation of Collection Booth at Prison - Kandy

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
31.7	76x1.2mm thick natural aluminium partition frame is panelled with aluminium composite panel of total thickness 4mm, with both sides Polyester coated aluminium sheets of 0.2mm thick, 1220 mm height, completed with board joint stapled with necessary pop rivots, gasket & etc. and work complete in order	5	m2		
31.8	sashes 50x25mm 0.9mm thick natural aluminium door frame with double sash saloon hinged dual swing openable door with 50x26 Aluminium door section outer rail panelling with Polyester coated aluminium composite panel of 0.12 mm thick aluminium sheets both sides of total thickness 3mm at panel, rubber beading, gaskets, poprivots, with nut and approved hinges for saloon doors	1.5	m2		
31.9	Supply and fix zinc alum profile roofing colour sheet with screws and washer, laid on existing purlings with joints to be properly connected with an adequate side lap to ensure water tightness along the entire length and complete to working order.(Thk. 0.47mm, AZ 150)	5	m2		
31.10	Supply and fix 460mmx 380mm stainless steel 0.8mm thick shiny finish kitchen sink with single bowl an authorized agent, including PVC bottle trap and water connection with flexible hose, all complete to working order.(Swannecktap paid separately.) Prime cost of the kitchen sink is Rs.10,750.00(sink frame paid separatly)	1	nos		
31.11	Supplying and fixing Plastic 1/2" Swan-necktap of "S-lon" brand or approved equivalent.	1	nos		
31.12	Allow provisional sum for, 1.)Supplying water line and supply line including all fittings. Waste line should connecting to existing gulley line properly. 2.)Arranging sample table. 3.)connecting the roofing sheet to existing frame.	PS			20,000.00
Total Cost Carried to Summary					

BOQ For Installation of Collection Booth at DH - Akurana

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
	<i>All renovations are to be carried out disturbance to the hygienic condition maintained within the hospital premises. Safety precautions shall be included into relevant rates of items of the BOQ.</i>	Note			
	<i>Prior approval for materials shall be obtained from Engineer Before Commencing Work.</i>	Note			
	<i>Paint sample should be approved by Engineer</i>	Note			
	<i>Before leaving the site clean to the satisfaction of the Engineer at the completion of work.</i>	Note			
	<i>Any other Work except this Work sheet should be approved in formal way before commencing Work.</i>	Note			
	Proposed Collection Booth				
	32. DH - Akurana				
32.1	Site Clearing, Removing All kind of plants, . manual excavation for floor concrete.	1.5	L day		
32.2	concrete (Grade 20) prepared at site manually., floor area etc	0.2	m3		
32.3	Shuttering for floor concrete dation with 1" thick rubber planking including dismantling	2	m2		
32.4	Supplying and fixing GI box bar 40mm x 40mm x1.4 mm thickness for of Coulumns(04 nos), roof, wash basin, sample table. Without Painting.	15	lm		
32.5	Painting two coats of enamel paint for columns including clearing surface before commencing painting work.	15	lm		
32.6	Rendering 1/2" thick in cement and sand 1:3 in concrete areas finished smooth with cement slurry and colour pigment.	2	m2		

BOQ For Installation of Collection Booth at DH - Akurana

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
32.7	76x1.2mm thick natural aluminium partition frame is panelled with aluminium composite panel of total thickness 4mm, with both sides Polyester coated aluminium sheets of 0.2mm thick, 1220 mm height, completed with board joint stapled with necessary pop rivots, gasket & etc. and work complete in order	5	m2		
32.8	sashes 50x25mm 0.9mm thick natural aluminium door frame with double sash saloon hinged dual swing openable door with 50x26 Aluminium door section outer rail panelling with Polyester coated aluminium composite panel of 0.12 mm thick aluminium sheets both sides of total thickness 3mm at panel, rubber beading, gaskets, poprivots, with nut and approved hinges for saloon doors	1.5	m2		
32.9	Supply and fix zinc alum profile roofing colour sheet with screws and washer, laid on existing purlings with joints to be properly connected with an adequate side lap to ensure water tightness along the entire length and complete to working order.(Thk. 0.47mm, AZ 150)	5	m2		
32.10	Supply and fix 460mmx 380mm stainless steel 0.8mm thick shiny finish kitchen sink with single bowl an authorized agent, including PVC bottle trap and water connection with flexible hose, all complete to working order.(Swannecktap paid separately.) Prime cost of the kitchen sink is Rs.10,750.00(sink frame paid separatly)	1	nos		
32.11	Supplying and fixing Plastic 1/2" Swan-necktap of "S-lon" brand or approved equivalent.	1	nos		
32.12	Allow provisional sum for: 1.)Supplying water line and supply line including all fittings. Waste line should connecting to existing gulley line properly. 2.)Arranging sample table. 3.)conncting the roofing sheet to existing frame.		PS		20,000.00
Total Cost Carried to Summary					

BOQ For Installation of Collection Booth at BH - Theldeniya

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
	<i>All renovations are to be carried out disturbance to the hygienic condition maintained within the hospital premises. Safety precautions shall be included into relevant rates of items of the BOQ.</i>	Note			
	<i>Prior approval for materials shall be obtained from Engineer Before Commencing Work.</i>	Note			
	<i>Paint sample should be approved by Engineer</i>	Note			
	<i>Before leaving the site clean to the satisfaction of the Engineer at the completion of work.</i>	Note			
	<i>Any other Work except this Work sheet should be approved in formal way before commencing Work.</i>	Note			
	Proposed Collection Booth				
	33. BH - Theldeniya				
33.1	Site Clearing, Removing All kind of plants, , manual excavation for floor concrete.	1.5	L day		
33.2	concrete (Grade 20) prepared at site manually., floor area etc	0.2	m3		
33.3	Shuttering for floor concrete dation with 1" thick rubber planking including dismantling	2	m2		
33.4	Supplying and fixing GI box bar 40mm x 40mm x1.4 mm thickness for of Coulumns(04 nos), roof, wash basin, sample table. Without Painting.	15	lm		
33.5	Painting two coats of enamel paint for columns including clearing surface before commencing painting work.	15	lm		
33.6	Rendering 1/2" thick in cement and sand 1:3 in concrete areas finished smooth with cement slurry and colour pigment.	2	m2		

BOQ For Installation of Collection Booth at BH - Theldeniya

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
33.7	76x1.2mm thick natural aluminium partition frame is panelled with aluminium composite panel of total thickness 4mm, with both sides Polyester coated aluminium sheets of 0.2mm thick, 1220 mm height, completed with board joint stapled with necessary pop rivots, gasket & etc. and work complete in order	5	m2		
33.8	sashes 50x25mm 0.9mm thick natural aluminium door frame with double sash saloon hinged dual swing openable door with 50x26 Aluminium door section outer rail panelling with Polyester coated aluminium composite panel of 0.12 mm thick aluminium sheets both sides of total thickness 3mm at panel, rubber beading, gaskets, poprivots, with nut and approved hinges for saloon doors	1.5	m2		
33.9	Supply and fix zinc alum profile roofing colour sheet with screws and washer, laid on existing purlings with joints to be properly connected with an adequate side lap to ensure water tightness along the entire length and complete to working order.(Thk. 0.47mm, AZ 150)	5	m2		
33.10	Supply and fix 460mmx 380mm stainless steel 0.8mm thick shiny finish kitchen sink with single bowl an authorized agent. including PVC bottle trap and water connection with flexible hose, all complete to working order.(Swannecktap paid separately.) Prime cost of the kitchen sink is Rs.10,750.00(sink frame paid separatly)	1	nos		
33.11	Supplying and fixing Plastic 1/2" Swan-necktapof"S-lon"brand or approved equivalent.	1	nos		
33.12	Allow provisonal sum for . 1.)Supplying water line and supply line including all fittings. Waste line should connecting to existing gulley line properly. 2.)Arranging sample table. 3.)connecting the roofing sheet to existing frame.		PS		20,000.00
Total Cost Carried to Summary					

BOQ For Installation of Collection Booth at DH - Katupotha

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
	<i>All renovations are to be carried out disturbance to the hygienic condition maintained within the hospital premises. Safety precautions shall be included into relevant rates of items of the BOQ.</i>				
	<i>Prior approval for materials shall be obtained from Engineer Before Commencing Work.</i>				
	<i>Paint sample should be approved by Engineer</i>				
	<i>Before leaving the site clean to the satisfaction of the Engineer at the completion of work.</i>				
	<i>Any other Work except this Work sheet should be approved in formal way before commencing Work.</i>				
	Proposed Collection Booth				
	34. DH - Katupotha				
34.1	Site Clearing, Removing All kind of plants, , manual excavation for floor concrete.	1.5	L day		
34.2	concrete (Grade 20) prepared at site manually., floor area etc ,...	0.2	m3		
34.3	Shuttering for floor concrete dation with 1" thick rubber planking including dismantling	2	m2		
34.4	Supplying and fixing GI box bar 40mm x 40mm x1.4 mm thickness for of Coulumns(04 nos), roof, wash basin, sample table. Without Painting.	15	lm		
34.5	Painting two coats of enamel paint for columns including clearing surface before commencing painting work.	15	lm		
34.6	Rendering 1/2" thick in cement and sand 1:3 in concrete areas finished smooth with cement slurry and colour pigment.	2	m2		

BOQ For Installation of Collection Booth at DH - Katupotha

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
34.7	76x1.2mm thick natural aluminium partition frame is panelled with aluminium composite panel of total thickness 4mm, with both sides Polyester coated aluminium sheets of 0.2mm thick, 1220 mm height, completed with board joint stapled with necessary pop rivots, gasket & etc. and work complete in order	5	m2		
33.8	sashes 50x25mm 0.9mm thick natural aluminium door frame with double sash saloon hinged dual swing openable door with 50x26 Aluminium door section outer rail panelling with Polyester coated aluminium composite panel of 0.12 mm thick aluminium sheets both sides of total thickness 3mm at panel, rubber beading, gaskets, poprivots, with nut and approved hinges for saloon doors	1.5	m2		
32.9	Supply and fix zinc alum profile roofing colour sheet with screws and washer, laid on existing purlings with joints to be properly connected with an adequate side lap to ensure water tightness along the entire length and complete to working order.(Thk. 0.47mm, AZ 150)	5	m2		
34.10	Supply and fix 460mmx 380mm stainless steel 0.8mm thick shiny finish kitchen sink with single bowl an authorized agent, including PVC bottle trap and water connection with flexible hose, all complete to working order.(Swannecktap paid separately.) Prime cost of the kitchen sink is Rs.10,750.00(sink frame paid separatly)	1	nos		
34.11	Supplying and fixing Plastic 1/2" Swan-necktap of "S-lon" brand or approved equivalent.	1	nos		
34.12	Allow provisonal sum for . 1.)Supplying water line and supply line including all fittings. Waste line should connecting to existing gulley line properly. 2.)Arranging sample table. 3.)conncting the roofing sheet to existing frame.		PS		20,000.00
Total Cost Carried to Summary					

J

BOQ For Installation of Collection Booth at DH - Rideegama

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
	<p><i>All renovations are to be carried out disturbance to the hygienic condition maintained within the hospital premises. Safety precautions shall be included into relevant rates of items of the BOQ.</i></p> <p><i>Prior approval for materials shall be obtained from Engineer Before Commencing Work.</i></p> <p><i>Paint sample should be approved by Engineer</i></p> <p><i>Before leaving the site clean to the satisfaction of the Engineer at the completion of work.</i></p> <p><i>Any other Work except this Work sheet should be approved in formal way before commencing Work.</i></p> <p>Proposed Collection Booth</p> <p>35. DH - Rideegama</p>				
35.1	Site Clearing, Removing All kind of plants, , manual excavation for floor concrete.	1.5	L day		
35.2	concrete (Grade 20) prepared at site manually., floor area etc ,,,,	0.2	m3		
35.3	Shuttering for floor concrete dation with 1" thick rubber planking including dismantling	2	m2		
35.4	Supplying and fixing G1 box bar 40mm x 40mm x1.4 mm thickness for of Coulumns(04 nos), roof, wash basin, sample table. Without Painting.	15	lm		
35.5	Painting two coats of enamel paint for columns including clearing surface before commencing painting work.	15	lm		
35.6	Rendering 1/2" thick in cement and sand 1:3 in concrete areas finished smooth with cement slurry and colour pigment.	2	m2		

BOQ For Installation of Collection Booth at DH - Rideegama

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
35.7	76x1.2mm thick natural aluminium partition frame is panelled with aluminium composite panel of total thickness 4mm. with both sides Polyester coated aluminium sheets of 0.2mm thick, 1220 mm height, completed with board joint stapled with necessary pop rivots, gasket & etc. and work complete in order	5	m2		
35.8	sashes 50x25mm 0.9mm thick natural aluminium door frame with double sash saloon hinged dual swing openable door with 50x26 Aluminium door section outer rail panelling with Polyester coated aluminium composite panel of 0.12 mm thick aluminium sheets both sides of total thickness 3mm at panel, rubber beading, gaskets, poprivots, with nut and approved hinges for saloon doors	1.5	m2		
35.9	Supply and fix zinc alum profile roofing colour sheet with screws and washer, laid on existing purlings with joints to be properly connected with an adequate side lap to ensure water tightness along the entire length and complete to working order.(Thk. 0.47mm, AZ 150)	5	m2		
35.10	Supply and fix 460mmx 380mm stainless steel 0.8mm thick shiny finish kitchen sink with single bowl an authorized agent. including PVC bottle trap and water connection with flexible hose, all complete to working order.(Swannecktap paid separately.) Prime cost of the kitchen sink is Rs.10,750.00(sink frame paid separatly)	1	nos		
35.11	Supplying and fixing Plastic 1/2" Swan-necktap of "S-Ion" brand or approved equivalent.	1	nos		
35.12	Allow provisional sum for . 1.)Supplying water line and supply line including all fittings. Waste line should connecting to existing gulley line properly. 2.)Arranging sample table. 3.)connecting the roofing sheet to existing frame.	PS			20,000.00
Total Cost Carried to Summary					

[Signature]

BOQ For Installation of Collection Booth at DH - Polgahawela

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
	<i>All renovations are to be carried out disturbance to the hygienic condition maintained within the hospital premises. Safety precautions shall be included into relevant rates of items of the BOQ.</i>				
	<i>Prior approval for materials shall be obtained from Engineer Before Commencing Work.</i>				
	<i>Paint sample should be approved by Engineer</i>				
	<i>Before leaving the site clean to the satisfaction of the Engineer at the completion of work.</i>				
	<i>Any other Work except this Work sheet should be approved in formal way before commencing Work.</i>				
	Proposed Collection Booth				
	36. DH - Polgahawela				
36.1	Site Clearing, Removing All kind of plants, , manual excavation for floor concrete.	1.5	L day		
36.2	concrete (Grade 20) prepared at site manually., floor area etc	0.2	m3		
36.3	Shuttering for floor concrete dation with 1" thick rubber planking including dismantling	2	m2		
36.4	Supplying and fixing GI box bar 40mm x 40mm x 1.4 mm thickness for of Coulumns(04 nos), roof, wash basin, sample table. Without Painting.	15	lm		
36.5	Painting two coats of enamel paint for columns including clearing surface before commencing painting work.	15	lm		
36.6	Rendering 1/2" thick in cement and sand 1:3 in concrete areas finished smooth with cement slurry and colour pigment.	2	m2		

F

9

BOQ For Installation of Collection Booth at DH - Polgahawela

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
36.7	76x1.2mm thick natural aluminium partition frame is panelled with aluminium composite panel of total thickness 4mm, with both sides Polyester coated aluminium sheets of 0.2mm thick, 1220 mm height, completed with board joint stapled with necessary pop rivots, gasket & etc, and work complete in order	5	m2		
36.8	sashes 50x25mm 0.9mm thick natural aluminium door frame with double sash saloon hinged dual swing openable door with 50x26 Aluminium door section outer rail panelling with Polyester coated aluminium composite panel of 0.12 mm thick aluminium sheets both sides of total thickness 3mm at panel, rubber beading, gaskets, poprivots, with nut and approved hinges for saloon doors	1.5	m2		
36.9	Supply and fix zinc alum profile roofing colour sheet with screws and washer, laid on existing purlings with joints to be properly connected with an adequate side lap to ensure water tightness along the entire length and complete to working order.(Thk. 0.47mm, AZ 150)	5	m2		
36.10	Supply and fix 460mmx 380mm stainless steel 0.8mm thick shiny finish kitchen sink with single bowl an authorized agent, including PVC bottle trap and water connection with flexible hose, all complete to working order.(Swannecktap paid separately.) Prime cost of the kitchen sink is Rs.10,750.00(sink frame paid separatly)	1	nos		
36.11	Supplying and fixing Plastic 1/2" Swan-necktap of "S-lon" brand or approved equivalent.	1	nos		
36.12	Allow provisional sum for. 1.)Supplying water line and supply line including all fittings. Waste line should connecting to existing gulley line properly. 2.)Arranging sample table. 3.)connecting the roofing sheet to existing frame.		PS		20,000.00
Total Cost Carried to Summary					



BOQ For Installation of Collection Booth at TH - Rathnapura

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
	<i>All renovations are to be carried out disturbance to the hygienic condition maintained within the hospital premises. Safety precautions shall be included into relevant rates of items of the BOQ.</i>	Note			
	<i>Prior approval for materials shall be obtained from Engineer Before Commencing Work.</i>	Note			
	<i>Paint sample should be approved by Engineer</i>	Note			
	<i>Before leaving the site clean to the satisfaction of the Engineer at the completion of work.</i>	Note			
	<i>Any other Work except this Work sheet should be approved in formal way before commencing Work.</i>	Note			
	Proposed Collection Booth				
	37. TH - Rathnapura				
37.1	Site Clearing, Removing All kind of plants, , manual excavation for floor concrete.	1.5	L day		
37.2	concrete (Grade 20) prepared at site manually,, floor area etc	0.2	m3		
37.3	Shuttering for floor concrete dation with 1" thick rubber planking including dismantling	2	m2		
37.4	Supplying and fixing GI box bar 40mm x 40mm x1.4 mm thickness for of Coulumns(04 nos), roof, wash basin, sample table. Without Painting.	15	lm		
37.5	Painting two coats of enamel paint for columns including clearing surface before commencing painting work.	15	lm		
37.6	Rendering 1/2" thick in cement and sand 1:3 in concrete areas finished smooth with cement slurry and colour pigment.	2	m2		

BOQ For Installation of Collection Booth at TH - Rathnapura

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
37.7	76x1.2mm thick natural aluminium partition frame is panelled with aluminium composite panel of total thickness 4mm. with both sides Polyester coated aluminium sheets of 0.2mm thick, 1220 mm height, completed with board joint stapled with necessary pop rivots, gasket & etc. and work complete in order	5	m2		
37.8	sashes 50x25mm 0.9mm thick natural aluminium door frame with double sash saloon hinged dual swing openable door with 50x26 Aluminium door section outer rail panelling with Polyester coated aluminium composite panel of 0.12 mm thick aluminium sheets both sides of total thickness 3mm at panel, rubber beading, gaskets, poprivots, with nut and approved hinges for saloon doors	1.5	m2		
37.9	Supply and fix zinc alum profile roofing colour sheet with screws and washer, laid on existing purlings with joints to be properly connected with an adequate side lap to ensure water tightness along the entire length and complete to working order.(Thk. 0.47mm, AZ 150)	5	m2		
37.10	Supply and fix 460mmx 380mm stainless steel 0.8mm thick shiny finish kitchen sink with single bowl an authorized agent. including PVC bottle trap and water connection with flexible hose, all complete to working order.(Swannecktap paid separately.) Prime cost of the kitchen sink is Rs.10,750.00(sink frame paid separatly)	1	nos		
37.11	Supplying and fixing Plastic 1/2" Swan-necktap of "S-lon" brand or approved equivalent.	1	nos		
37.12	Allow provisional sum for 1.)Supplying water line and supply line including all fittings. Waste line should connecting to existing gulley line properly. 2.)Arranging sample table. 3.)connecting the roofing sheet to existing frame.		PS		20,000.00
Total Cost Carried to Summary					

BOQ For Installation of Collection Booth at BH - Kalawana

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
	<p><i>All renovations are to be carried out disturbance to the hygienic condition maintained within the hospital premises. Safety precautions shall be included into relevant rates of items of the BOQ.</i></p> <p><i>Prior approval for materials shall be obtained from Engineer Before Commencing Work.</i></p> <p><i>Paint sample should be approved by Engineer</i></p> <p><i>Before leaving the site clean to the satisfaction of the Engineer at the completion of work.</i></p> <p><i>Any other Work except this Work sheet should be approved in formal way before commencing Work.</i></p> <p>Proposed Collection Booth</p> <p>38. BH - Kalawana</p>				
38.1	Site Clearing, Removing All kind of plants, , manual excavation for floor concrete.	1.5	L day		
38.2	concrete (Grade 20) prepared at site manually., floor area etc	0.2	m3		
38.3	Shuttering for floor concrete dation with 1" thick rubber planking including dismantling	2	m2		
38.4	Supplying and fixing GI box bar 40mm x 40mm x 1.4 mm thickness for of Coulumns(04 nos), roof, wash basin, sample table. Without Painting.	15	lm		
38.5	Painting two coats of enamel paint for columns including clearing surface before commencing painting work.	15	lm		
38.6	Rendering 1/2" thick in cement and sand 1:3 in concrete areas finished smooth with cement slurry and colour pigment.	2	m2		

BOQ For Installation of Collection Booth at BH - Kalawana

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
38.7	76x1.2mm thick natural aluminium partition frame is panelled with aluminium composite panel of total thickness 4mm, with both sides Polyester coated aluminium sheets of 0.2mm thick, 1220 mm height, completed with board joint stapled with necessary pop rivots, gasket & etc. and work complete in order	5	m2		
38.8	sashes 50x25mm 0.9mm thick natural aluminium door frame with double sash saloon hinged dual swing openable door with 50x26 Aluminium door section outer rail panelling with Polyester coated aluminium composite panel of 0.12 mm thick aluminium sheets both sides of total thickness 3mm at panel, rubber beading, gaskets, poprivots, with nut and approved hinges for saloon doors	1.5	m2		
38.9	Supply and fix zinc alum profile roofing colour sheet with screws and washer, laid on existing purlings with joints to be properly connected with an adequate side lap to ensure water tightness along the entire length and complete to working order.(Thk. 0.47mm, AZ 150)	5	m2		
38.10	Supply and fix 460mmx 380mm stainless steel 0.8mm thick shiny finish kitchen sink with single bowl an authorized agent, including PVC bottle trap and water connection with flexible hose, all complete to working order.(Swannecktap paid separately.) Prime cost of the kitchen sink is Rs.10,750.00(sink frame paid separatly)	1	nos		
38.11	Supplying and fixing Plastic 1/2" Swan-necktapof "S-lon" brand or approved equivalent.	1	nos		
38.12	Allow provisional sum for 1.)Supplying water line and supply line including all fittings. Waste line should connecting to existing gulley line properly. 2.)Arranging sample table. 3.)connecting the roofing sheet to existing frame.		PS		20,000.00
Total Cost Carried to Summary					

BOQ For Installation of Collection Booth at BH - Kahawatta

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
	<i>All renovations are to be carried out disturbance to the hygienic condition maintained within the hospital premises. Safety precautions shall be included into relevant rates of items of the BOQ.</i>				
	<i>Prior approval for materials shall be obtained from Engineer Before Commencing Work.</i>				
	<i>Paint sample should be approved by Engineer</i>				
	<i>Before leaving the site clean to the satisfaction of the Engineer at the completion of work.</i>				
	<i>Any other Work except this Work sheet should be approved in formal way before commencing Work.</i>				
	Proposed Collection Booth				
	39. BH - Kahawatta				
39.1	Site Clearing, Removing All kind of plants, , manual excavation for floor concrete.	1.5	L day		
39.2	concrete (Grade 20) prepared at site manually., floor area etc	0.2	m3		
39.3	Shuttering for floor concrete dation with 1" thick rubber planking including dismantling	2	m2		
39.4	Supplying and fixing GI box bar 40mm x 40mm x1.4 mm thickness for of Coulumns(04 nos), roof, wash basin, sample table. Without Painting.	15	lm		
39.5	Painting two coats of enamel paint for columns including clearing surface before commencing painting work.	15	lm		
39.6	Rendering 1/2" thick in cement and sand 1:3 in concrete areas finished smooth with cement slurry and colour pigment.	2	m2		

BOQ For Installation of Collection Booth at BH - Kahawatta

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
39.7	76x1.2mm thick natural aluminium partition frame is panelled with aluminium composite panel of total thickness 4mm, with both sides Polyester coated aluminium sheets of 0.2mm thick, 1220 mm height, completed with board joint stapled with necessary pop rivots, gasket & etc. and work complete in order	5	m2		
39.8	sashes 50x25mm 0.9mm thick natural aluminium door frame with double sash saloon hinged dual swing openable door with 50x26 Aluminium door section outer rail panelling with Polyester coated aluminium composite panel of 0.12 mm thick aluminium sheets both sides of total thickness 3mm at panel, rubber heading, gaskets, poprivots, with nut and approved hinges for saloon doors	1.5	m2		
39.9	Supply and fix zinc alum profile roofing colour sheet with screws and washer, laid on existing purlings with joints to be properly connected with an adequate side lap to ensure water tightness along the entire length and complete to working order. (Thk. 0.47mm, AZ 150)	5	m2		
39.10	Supply and fix 460mmx 380mm stainless steel 0.8mm thick shiny finish kitchen sink with single bowl an authorized agent, including PVC bottle trap and water connection with flexible hose, all complete to working order. (Swannecktap paid separately.) Prime cost of the kitchen sink is Rs.10,750.00 (sink frame paid separatly)	1	nos		
39.11	Supplying and fixing Plastic 1/2" Swan-necktap of "S-lon" brand or approved equivalent.	1	nos		
39.12	Allow provisional sum for . 1.) Supplying water line and supply line including all fittings. Waste line should connecting to existing gulley line properly. 2.) Arranging sample table. 3.) connecting the roofing sheet to existing frame.	PS			20,000.00
Total Cost Carried to Summary					

J-

78

BOQ For Installation of Collection Booth at DH - Maligawatta

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
	<i>All renovations are to be carried out disturbance to the hygienic condition maintained within the hospital premises. Safety precautions shall be included into relevant rates of items of the BOQ.</i>				
	<i>Prior approval for materials shall be obtained from Engineer Before Commencing Work.</i>				
	<i>Paint sample should be approved by Engineer</i>				
	<i>Before leaving the site clean to the satisfaction of the Engineer at the completion of work.</i>				
	<i>Any other Work except this Work sheet should be approved in formal way before commencing Work.</i>				
	Proposed Collection Booth				
	40. DH - Maligawatta				
40.1	Site Clearing, Removing All kind of plants, , manual excavation for floor concrete.	1.5	L day		
40.2	concrete (Grade 20) prepared at site manually., floor area etc	0.2	m3		
40.3	Shuttering for floor concrete dation with 1" thick rubber planking including dismantling	2	m2		
40.4	Supplying and fixing GI box bar 40mm x 40mm x1.4 mm thickness for of Coulumns(04 nos), roof, wash basin, sample table. Without Painting.	15	lm		
40.5	Painting two coats of enamel paint for columns including clearing surface before commencing painting work.	15	lm		
40.6	Rendering 1/2" thick in cement and sand 1:3 in concrete areas finished smooth with cement slurry and colour pigment.	2	m2		

BOQ For Installation of Collection Booth at DH - Maligawatta

Item	Description	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
40.7	76x1.2mm thick natural aluminium partition frame is panelled with aluminium composite panel of total thickness 4mm, with both sides Polyester coated aluminium sheets of 0.2mm thick, 1220 mm height, completed with board joint stapled with necessary pop rivots, gasket & etc. and work complete in order	5	m2		
40.8	sashes 50x25mm 0.9mm thick natural aluminium door frame with double sash saloon hinged dual swing openable door with 50x26 Aluminium door section outer rail panelling with Polyester coated aluminium composite panel of 0.12 mm thick aluminium sheets both sides of total thickness 3mm at panel, rubber beading, gaskets, poprivots, with nut and approved hinges for saloon doors	1.5	m2		
40.9	Supply and fix zinc alum profile roofing colour sheet with screws and washer, laid on existing purlings with joints to be properly connected with an adequate side lap to ensure water tightness along the entire length and complete to working order.(Thk. 0.47mm, AZ 150)	5	m2		
40.10	Supply and fix 460mmx 380mm stainless steel 0.8mm thick shiny finish kitchen sink with single bowl an authorized agent, including PVC bottle trap and water connection with flexible hose, all complete to working order.(Swannecktap paid separately.) Prime cost of the kitchen sink is Rs.10,750.00(sink frame paid separatly)	1	nos		
40.11	Supplying and fixing Plastic 1/2" Swan-necktap of "S-lon" brand or approved equivalent.	1	nos		
40.12	Allow provisional sum for. 1.)Supplying water line and supply line including all fittings. Waste line should connecting to existing gulley line properly. 2.)Arranging sample table. 3.)connecting the roofing sheet to existing frame.		PS		20,000.00
Total Cost Carried to Summary					

Installation of Collection Booths - 40 nos

ITEM No	DESCRIPTION	AMOUNT (Rs)
1	DCC Galle	
2	DCC Matale	
3	DCC Matara	
4	DCC Mullaithivu	
5	DCC Puttalam	
6	DCC Rathnapura	
7	Prison - Welikada	
8	PMCU Sedawatta	
9	DH Piliyandala	
10	DH Wethara	
11	Colombo South Teaching Hospital	
12	BH Homagama	
13	DGH Awissawella	
14	DGH Horana	
15	DH Mathugama	
16	BH Pimbura	
17	BH Beruwala	
18	Prison - Kaluthara	
19	DGH Negombo	
20	DH Biyagama	
21	PMCU Sinharamulla	
22	PMCU Hunupitiya	
23	Prison - Mahara	
24	Prison - Galle	
25	BH Udugama	
26	BH Elpitiya	
27	DH Baddegama	
28	DH Imaduwa	
29	NH Kandy	
30	BH Gampola	
31	Prison - Kandy	
32	DH Akurana	
33	BH Theldeniya	
34	DH Katupotha	
35	BH Rideegama	
36	DH Polgahawela	
37	TH Rathnapura	
38	BH Kalawana	
39	BH Kahawatta	
40	DH Maligawatta	
Total Carried to Main Summary		

B.O.Q - MAIN SUMMARY

		Amount	
		Rs.	Cts.
Bring Forward to Main Summary (total of 40 nos)	=		
Less Provisional Sum (40x rs 20000.00)	=		800,000.00
Sub Total - I	=		
Discount if any (..... %)	=		
Sub Total - II	=		
Add Provisional Sum (40x rs 20000.00)	=		800,000.00
Bid Amount before VAT carried to Form of Bid	=		
Add 18% VAT	=		
Total after VAT	=		

Bid amount before VAT in Words

Rupees.....

 & Centsonly

Bidder VAT Register No. (if any) :

.....

.....
 Signature of Bidder

.....
 Date

.....
 Name, Address & NIC No. of Bidder

.....
 Signature of Witness (1)

.....
 Signature of Witness (2)

.....
 Name, Address & NIC No. of Witness

.....
 Name, Address & NIC No. of Witness

Date :

Date :

[Handwritten signature]

SCHEDULE NO.01

BASIC PRICES OF MATERIALS

Material	Unit	Price (Rs.)	Remarks
Cement	Kg		
sand	cube		

Please note that the Tenderers should list out the prices for any other items required which are listed above. Please indicate the additional percentage chargeable to each item for calculation payments 20%

Section – 08

STANDARD FORMS (BID)

FORM OF BID SECURITY

.....
.....
[Insert issuing agency's Name and Address of issuing branch or office]

Beneficiary: Director, National Programme for Tuberculosis Control & Chest Diseases,
Public Health Complex, No 555/5, 4th Floor, Elvitigala Mw, Narahenpita,
Colombo 05.

Date:

Bid Guarantee No. :

We have been informed that [Name
of Bidder] (hereinafter called "**the Bidder**") has submitted to you its Bid dated
(hereinafter called "**the Bid**") for the execution of **INSTALLATION OF SPUTUM
COLLECTION BOOTHS - 40 NOS** [hereinafter called "**the Contract**"] under Invitation
for Bids No. (the IFB)

Furthermore, we understand that, according to the conditions, Bids must be supported
by a **Bid Guarantee**.


At the request of the **Bidder**, we
[Name of the Agency] hereby irrevocably undertake to pay you any sum or sums not exceeding
in total an amount of Rupees
.....[amount in words], (Rs.)[amount in
figure] upon receipt by us of your first demand in written accompanied by a written statement
stating that the **Bidder** is in breach of its obligation(s) under the **Bid** conditions, because the
Bidder :

- a) has withdrawn its Bid during the period of Bid Validity specified; or
- b) does not accept the correction of errors in accordance with the Instructions to Bidders
("the ITB") or
- c) having been notified of the acceptance of its Bid by the Employer during the period of
Bid validity, (i) fails or refuses to execute the Contract Form, if required or (ii) fails or
refuses to furnish the Performance Security, in accordance with the ITB.

This **Guarantee** shall expire, (a) if the Bidder is the successful bidder, upon our receipt
of copies of the Contract signed by the Bidder and of the Performance Security issued to you
by the Bidder; or (b) if the Bidder is not the successful Bidder, upon the earlier of (i) our
receipt of a copy of your notification to the Bidder that the Bidder was unsuccessful, otherwise
it will remain in force up to (date)

Consequently, any demand for payment under this Guarantee must be received by us at
the office on or before that date.

.....
Signature(s)




85-

Section – 09

Drawings

TB sampling cabin

Date: 20 May 2011

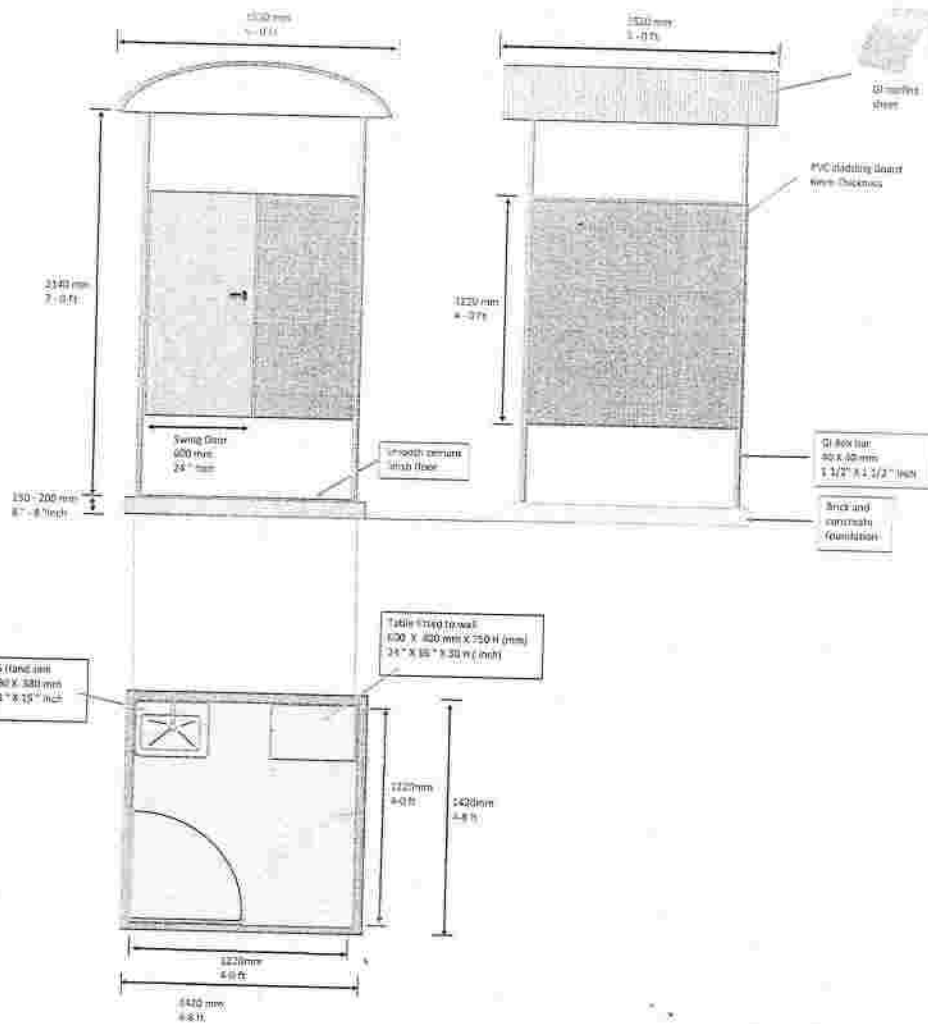

Handwritten signature/initials.